


Ta načrt velja za pogodbeno določene namene.

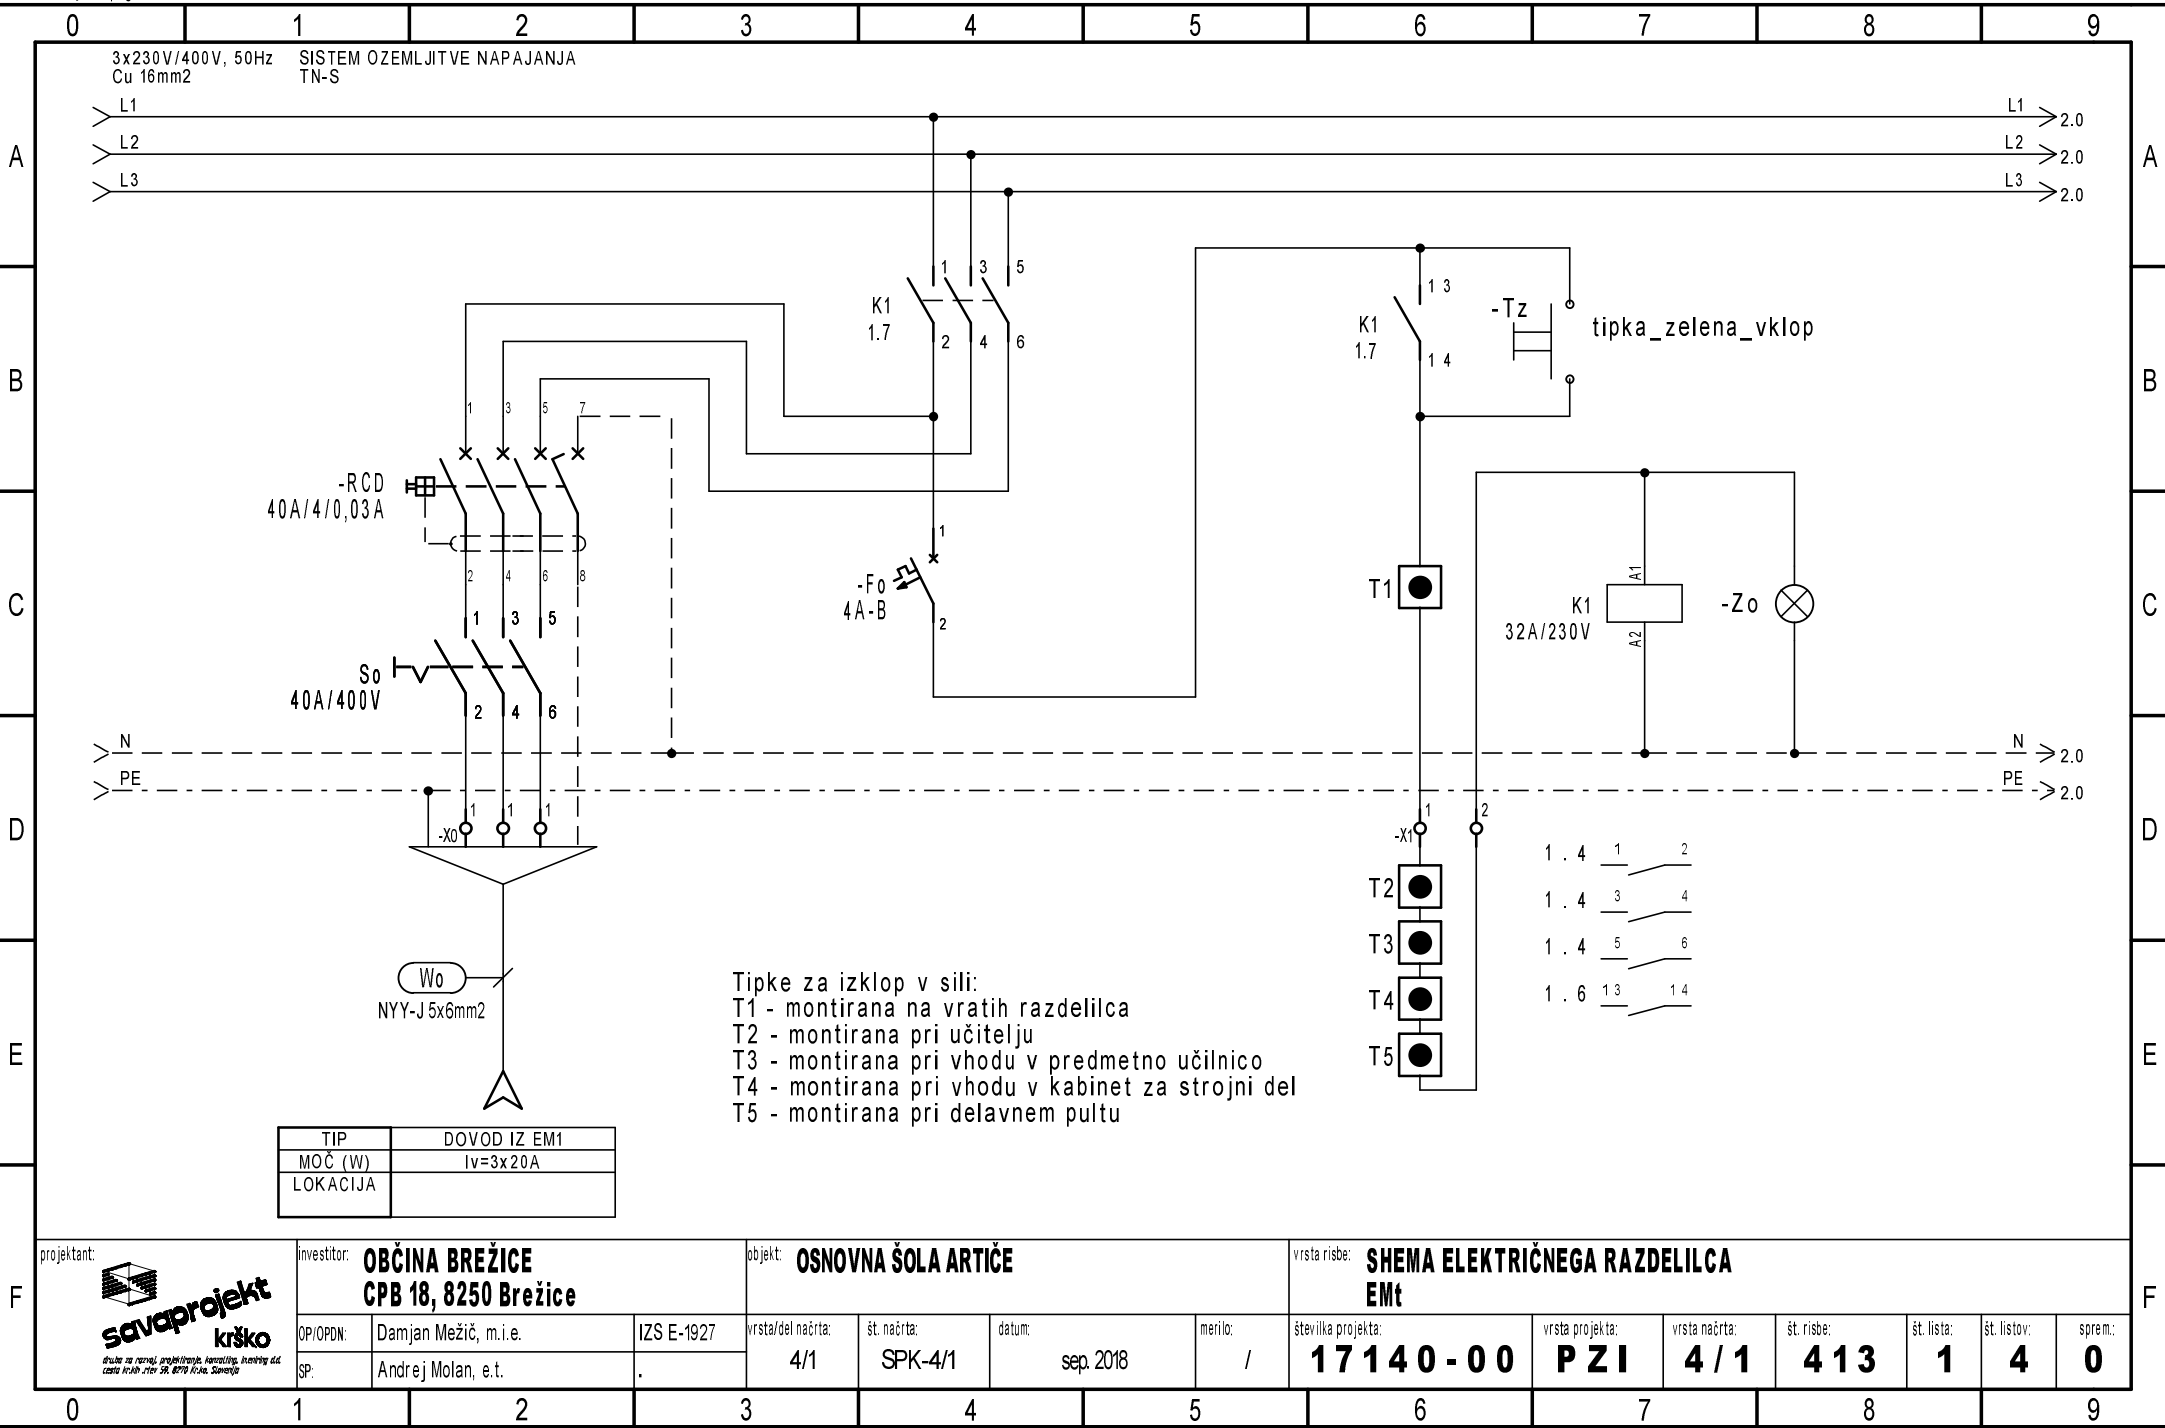

Ta načrt velja za pogodbeno določene namene.

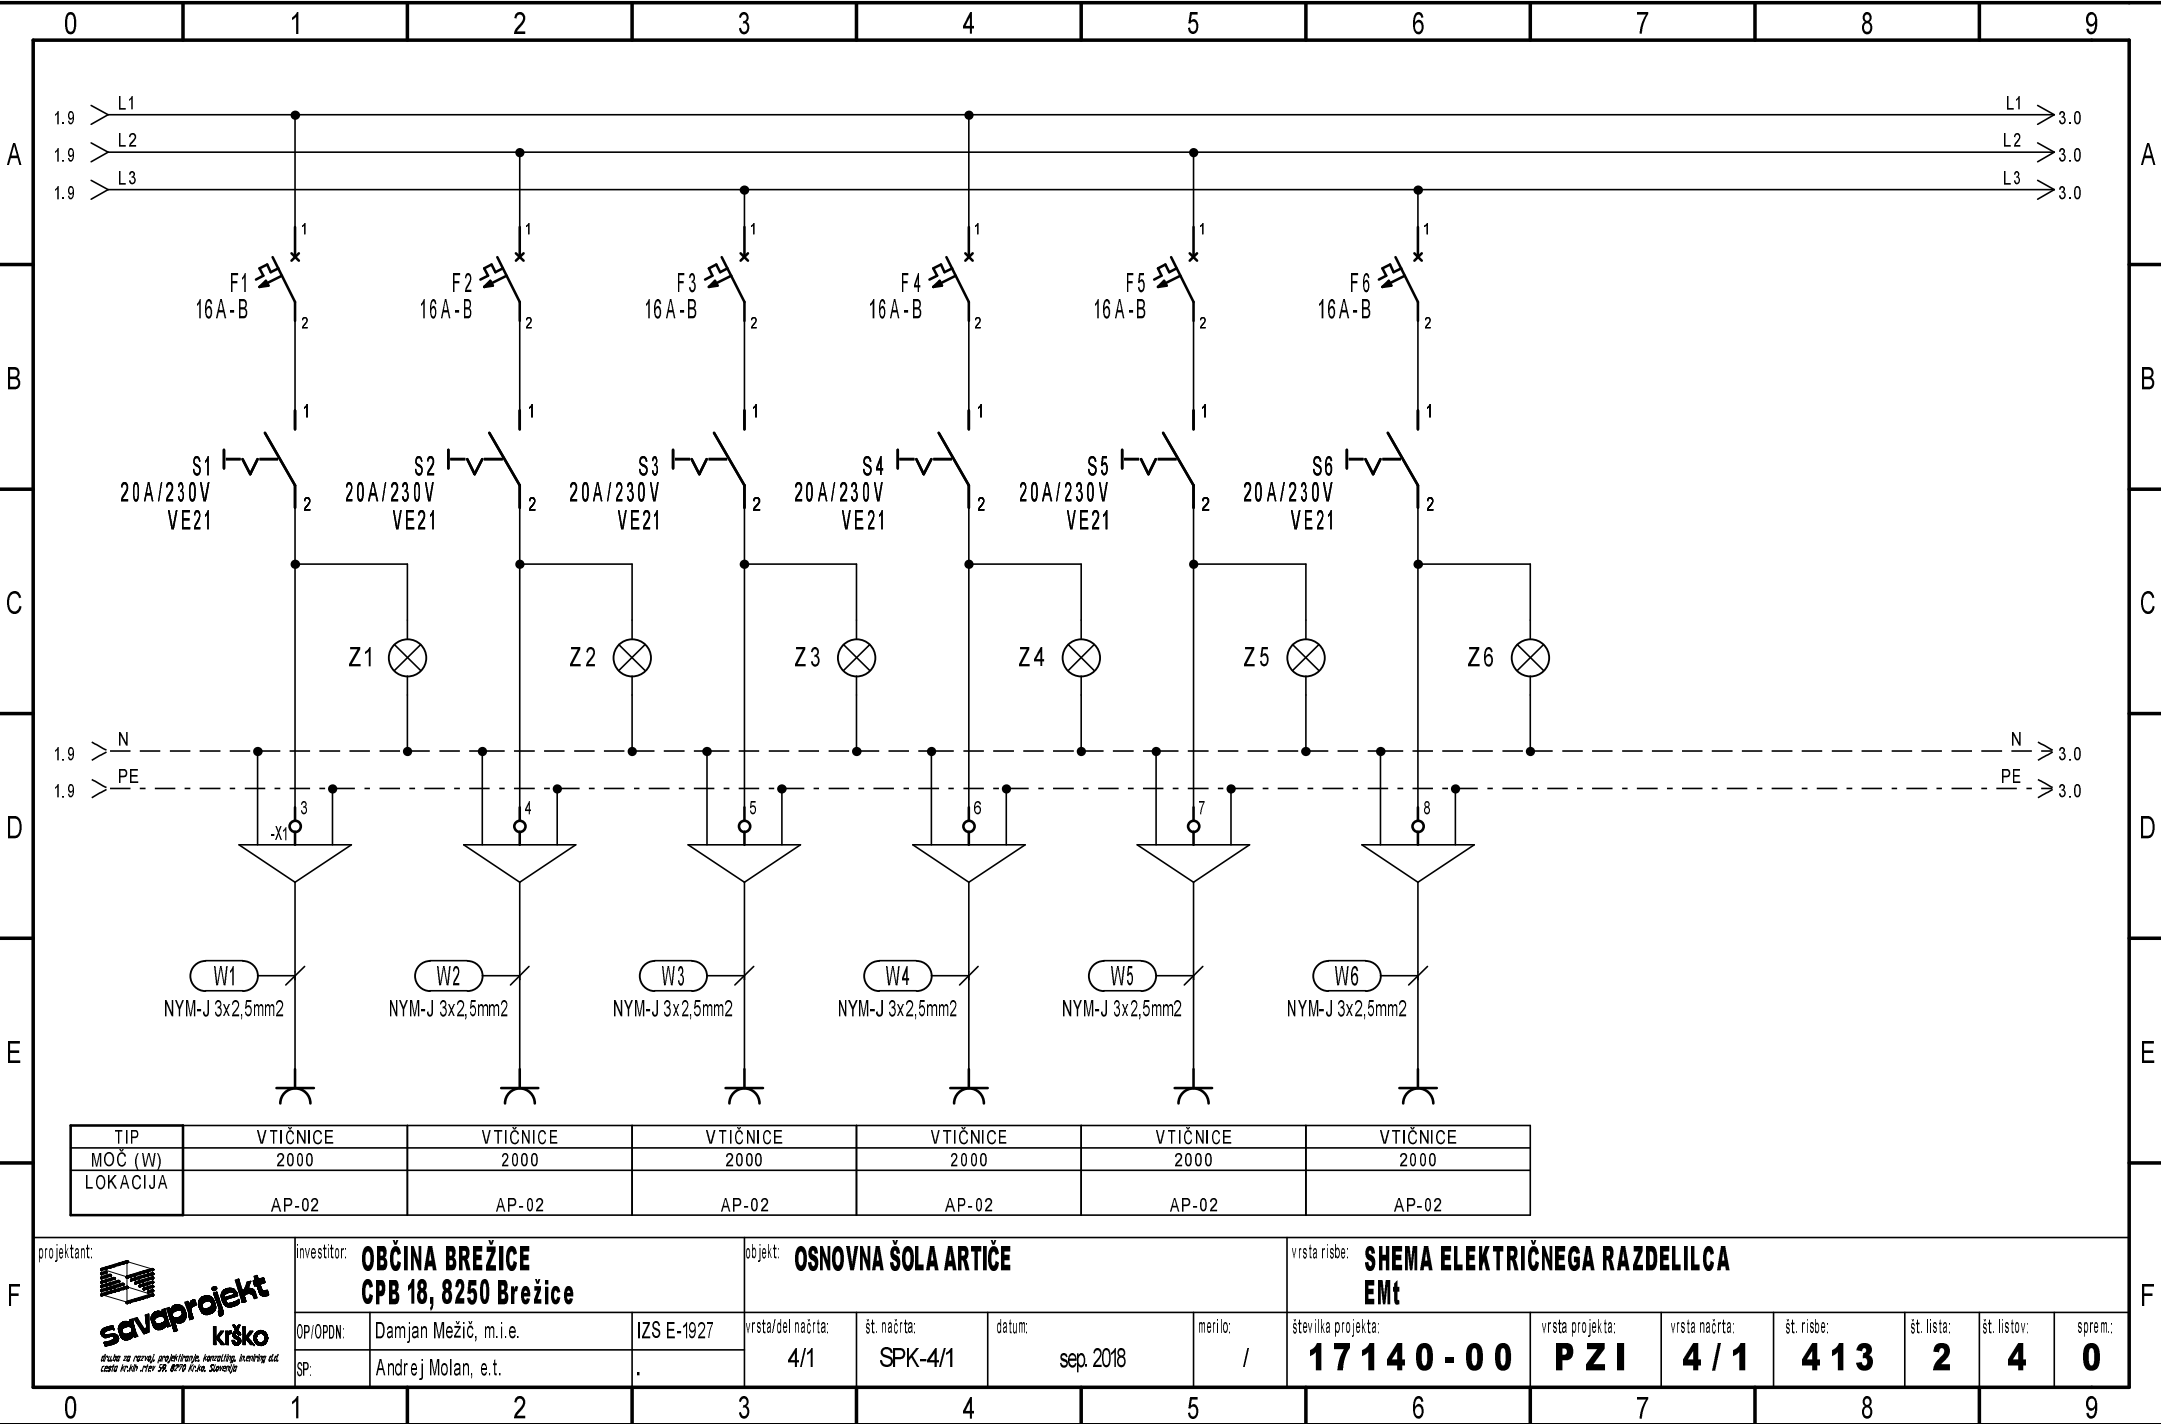


Diagram showing the electrical distribution system for the main school in Artiče (OSNOVNA ŠOLA ARTIČE). The system is divided into three main sections, each with its own distribution unit (VTIČNICE) and associated lighting fixtures (Z).

Section 1 (Left): Distribution unit VTIČNICE 2000, located at AP-02. It supplies three lighting fixtures (Z7, Z8, Z9) via switches S7, S8, and S9. The distribution unit is protected by a 16A-B fuse (F7) and a 20A/400V VE21 switch (S7). The wiring is NYM-J 5x2,5mm2 (W7).

Section 2 (Middle): Distribution unit VTIČNICE 2000, located at AP-02. It supplies three lighting fixtures (Z10, Z11, Z12) via switches S10, S11, and S12. The distribution unit is protected by a 16A-B fuse (F8) and a 20A/400V VE21 switch (S8). The wiring is NYM-J 5x2,5mm2 (W8).

Section 3 (Right): Distribution unit VTIČNICE 2000, located at AP-02. It supplies three lighting fixtures (Z13, Z14, Z15) via switches S13, S14, and S15. The distribution unit is protected by a 16A-B fuse (F9) and a 20A/400V VE21 switch (S9). The wiring is NYM-J 3x2,5mm2 (W9).

Section 4 (Far Right): Two reserve distribution units (REZERVA) with a capacity of 1000 each, located at AP-02. They are protected by 16A-B fuses (F10, F11) and 20A/230V VE21 switches (S10, S11). The wiring is NYM-J 3x2,5mm2 (W9).

Legend:

TIP	VTIČNICE	VTIČNICE	VTIČNICE	REZERVA	REZERVA
MOČ (W)	2000	2000	2000	1000	1000
LOKACIJA	AP-02	AP-02	AP-02		

Project Information:

projektant:	investitor:	objekt:	vrsta risbe:
savaprojekt krško	OBČINA BREŽICE CPB 18, 8250 Brežice	OSNOVNA ŠOLA ARTIČE	HEMA ELEKTRIČNEGA RAZDELILCA EMt
OP/OPDN:	Damjan Mežič, m.i.e.	IZS E-1927	vrsta projekta:
SP:	Andrej Molan, e.t.		vrsta načrta:
			št. risbe:
			št. lista:
			št. listov:
			spremlj:

Project Number: 17140-00

Project Name: PZI

Project Date: 4/1

Project Status: 413

Project Code: 3

Project Type: 4

Project Version: 0

Ta načrt velja za pogodbeno določene namene.

